

Technical Data Sheet BL 250 KIT 0075 CVVH

for Carpediem™ Cardio Renal Pediatric Dialysis Emergency Machine

Product Information

The Carpediem procedure pack is captive to use on the Carpediem system. This procedure pack is composed by the Carpediem preassembled device 0075 manufactured by Bellco S.r.l. and a 10 mL Luer Lok^{TM*} BD Plastipak syringe, that is manufactured by Becton Dickinson S.A.

The Carpediem preassembled device 0075 is sterile, single use, extracorporeal circuit and consists of a hemofilter and tubing lines, that are permanently connected, and three 3-liter waste bags. The hemofilter consists of a cylindrical body that contains a bundle of hollow fibers made of high permeability polysulfone. In the Carpediem preassembled device 0075, the hemofilter is connected to a blood access line, a blood return line and an infusion line, along with a heparin infusion line (figure 2).

The 10 mL Luer Lok™* BD Plastipak syringe is sterile, single use and inserted with its primary packaging in the procedure pack.



Figure 1. BL 250 KIT 0075 CVVH for Carpediem system

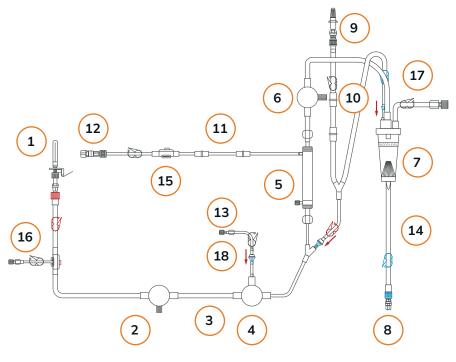


Figure 2

Legend

- 1) Arterial line Luer lock
- 2) Arterial pressure dome
- 3) Blood pump segment
- 4) Pre-filter pressure dome
- 5) Filter
- 6) Venous pressure dome

- 7) Venous chamber
- 8) Venous line Luer lock
- 9) Infusion line Luer lock
- 10) Infusion pump segment
- 11) Effluent pump segment
- 12) Effluent line Luer lock

- 13) Heparin line Luer lock
- 14) Venous return line
- 15) Effluent line with sampling port
- 16) Arterial service line
- 17) Venous service line
- 18) Heparin line

Applicable Therapies

The Carpediem preassembled device is indicated with the Carpediem system in extracorporeal blood treatment of pediatric patients weighing 2.5 kg or more with acute kidney injury, fluid overload and / or electrolyte disorders, requiring, hemofiltration (CVVH) or ultrafiltration / fluid removal (SCUF).

Depending on the configuration of the manual clamps, this device can perform the following treatments:

- Continuous Veno-Venous Hemofiltration (CVVH), a continuous form of hemofiltration with infusion of replacement fluid upstream (pre-infusion) or downstream (post-infusion) from the hemofilter. The solute transmembrane transport mechanism is convection. The ultrafiltrate is partly or completely replaced with an appropriate replacement fluid in order to obtain effective reduction of the solute concentration and effective fluid balance.
- Slow Continuous Ultrafiltration (SCUF), a treatment based solely on slow plasma water removal. It is generally used to manage patients who have fluid overload and / or are immune to pharmacologic treatment and may also have concomitant renal damage. The goal of the treatment is to achieve effective and safe correction of fluid overload. The solute concentration cannot be reduced using this treatment. SCUF treatment may be performed by programming CVVH therapy with an infusion volume equal to 0 mL.

Intended Use

Carpediem procedure pack for CVVH (Continuous Veno-Venous Hemofiltration) therapy.

Codes Available

CFN Procedure Pack	Procedure Pack Name	Medical Device Code	Medical Device Name	Medical Device Manufacturer	EMDN / CND ¹	GMND ¹
BL250 IB0595510 KIT 0075 CVVH	BI 250	IB0580800	Carpediem preassembled device 0075	Bellco S.r.l. Via Camurana 1 41037 Mirandola (MO) Italy. CE0123	EMDN: Z12090385	61674
	305959	BD Plastipak™* Syringe 10 mL Luer-Lok™*	Becton Dickinson S.A. Camino de Valdeoliva, s / n 28750 San Agustín del Guadalix, Madrid, Spain. CE0318	CND: A020102020102	47017	

¹The EMDN, CND and GMDN indicated in the table above refer to the Carpediem preassembled device 0075 and Plastipak™* Syringe 10 mL Luer-Lok™*

Sterilization method and validity

The Carpediem procedure pack is non-sterile and non-pyrogenic and has a shelf life of 3 years.

The shelf life of the procedure pack is determined by the component with the shortest shelf life.

In particular, the Carpediem preassembled device 0075 and the syringe are sterile and non-pyrogenic. Their sterilizing agent is ethylene oxide and they cannot be re-sterilized. The shelf life of a preassembled device is 3 year and the syringe is 5 years.

Technical Characteristics

The technical characteristics of the Carpediem procedure packs components are reported below.

Carpediem Preassembled device 0075

Bloodlines			
Components	Materials		
Tubing lines	Polyvinyl chloride (PVC)		
Blood pump segment	Polyvinyl chloride (PVC)		
Infusion pump segment	Polyvinyl chloride (PVC)		
Heparin line	Polyvinyl chloride (PVC)		
Pressure transducer membrane	Silicon rubber		
Tube adapter	Polyvinyl chloride (PVC)		
Line connector	Polyvinyl chloride (PVC) Methylmethacrylate acrylonitrile butadiene styrene (MABS)		
Pressure traducer holder	Polyvinyl chloride (PVC)		
Venous chamber	Polyvinyl chloride (PVC)		
Venous chamber filter	Polyethylene (PE)		
Filter connector	Polyvinyl chloride (PVC)		
Access port	Polyvinyl chloride (PVC) Isoprene Polypropylene (PP)		
Clamps	Polypropylene (PP)		
INF / UF luer connector ring	Polycarbonate (PC)		
Venous drip chamber service line cap	High density Polyethylene (HDPE)		
INF Y connector	Polyvinyl chloride (PVC)		
One-way valve	Silicon rubber Methylmethacrylate acrylonitrile butadiene styrene (MABS)		
Port caps	Polypropylene (PP)		
Vented spike	Acrylonitrile butadiene styrene (ABS) Low density polyethylene (LDPE) Linear low density polyethylene (LLDPE) Acrylic Polyamide (PA Polyvinyl chloride (PVC)		
Unvented spike	Acrylonitrile butadiene styrene (ABS) Low density polyethylene (LDPE)		
INF / UF luer connector	Polyvinyl chloride (PVC)		

Hemofilter Model		HCD 0075	
Hemofilter Surface area (m²)		0.075 ± 0.010	
Hemofilter Fiber (µm)	50		
Hemofilter Fiber (µm)	250		
Hemofilter Blood compartment priming volume (mL)		5	
Hemofilter Maximum TMP (mmHg)		500	
Hemofilter Maximum blood flow (mL / min)		50	
Hemofilter Maximum infusion flow (mL / min)		2.5	
Hemofilter Blood	Q _B 10 mL / min	21	
compartment pressure drop¹ (mmHg)	Q _B 50 mL / min	40	
Hemofilter Total length² (mm)		128	
Total priming volume preassembled device (mL)		26	

Hemofilter HCD 0075		
Components	Materials	
Membrane	Polysulfone	
Housing	Copolyester	
Header	Copolyester	
Potting	Polyurethane	

3-liter Waste Bag			
Components	Materials		
Film	Polyvinyl chloride (PVC) DOP free		
Tube	Polyvinyl chloride (PVC) DOP free		
Joint female Luer lock	Polyvinyl chloride (PVC)		
Vented male cone cap	Polypropylene (PP)		
Clamp	Polypropylene (PP)		

Syringe - Plastipak $^{\text{TM}*}$ / Syringe 10 mL Luer-Lok $^{\text{TM}*}$

Syringe ¹	
Components	Materials
Syringe Barrel	Polypropylene (PP)
Barrel lubricant	Medical grade silicon
Plunger	Polypropylene (PP)
Plunger colorant	PE/F
Stopper	Polyisoprene black rubber or Black TPE Copolymer
Scale	Ink / Dissolvent

 $^{^{\}rm 1}$ Technical data provided by the manufacturer Becton Dickinson S.A in data sheet EMEA-SOP039-F1

 $^{^{\}scriptscriptstyle 1}$ Bovine blood: Hct = 32 ± 3%, protein = 60 ± 5 g / L

² Hemofilter outer body characteristic

Performance

The measurements are taken in accordance with EN ISO 8637-1.† The values indicated are to be considered approximate and may vary due to measurement methods, inherent variations of the membrane, manufacturing and storage conditions. During the treatment, performance on the individual patient may vary due to variable clinical parameters of the patient.

Hemofilter - HCD 0075

Ultrafiltration Coefficient - K _{uf} (mL / h*mmHg) ¹		
Q _B 10 mL / min	Q _B 50 mL / min	
2.4	2.7	

Hemofilter Sieving Coefficient		
Inulin	1.0	
Myoglobin	0.72	
Albumin	0.005	

Packaging

Madal	Primary packaging			
Model	Pouch material	Tray	Pouch weight (g)	
Carpediem preassembled device 0075	Polyester / Polypropylene (PET / PP) Medical grade paper 60g / m²	Polypropylene (PP)	30	

Model	Secondary Packaging - Box	Secondary Packaging - Box					
	Single Box	Weight¹ (kg)	Multiple Box	Weight ² (kg)	UOM		
BL250 KIT 0075 CVVH	White colored Rippled Cardboard 4 mm – KBM / 222 / B Dimensions: 560 x 377 x 71 mm	0.7	Avana colored Rippled Cardboard 4 mm Dimensions: 582 x 382 x 297 mm	4.0	4/CT		

¹Single box's weight

Storage and Disposal Conditions

Storage conditions: store at temperatures between +5 and +30 degrees Celsius

Disposal: dispose the device after treatment in accordance with applicable government and health center regulations.

Biocompatibility

Biocompatibility tests of the preassembled device and 10 mL Luer Lok^{TM*} BD Plastipak syringe for Carpediem machine have been performed according to ISO 10993-1¹ and related applicable standard series.

Biocompatibility tests are the responsibility of the manufacturer of the medical devices inside the procedure packs.

[†] The different ISO standard mentioned in the document are in current revision.

 $^{^{1}}$ Bovine blood: Hct= 32 ± 3%, protein = 60 ± 5 g / L

² Multiple box's weight

Disclaimer

Carpediem Preassembled Device 0075 is a non-active, non-invasive, class IIb CE medical device manufactured by Bellco S.r.l.

BD Plastipak syringe is a medical device manufactured by Becton Dickinson S.A.

They are included in the Carpediem Procedure Pack.

For technical details regarding BD Plastipak™* Syringe 10 mL Luer-Lok™* contact the manufacturer Becton Dickinson S.A.

Important: Please refer to the package inserts for complete instructions, contraindications, warnings and precautions in your respective geography.

Mozarc Medical EMEA Regional Headquarters Via Varesina, 162 20156 Milano MI, Italy



emeacontactus@mozarcmedical.com



mozarcmedical.com/products/emea-en/



LinkedIn

Mozarc Medical is a DaVita | Medtronic company.

Copyright © 2024 Mozarc Medical Holding LLC. Mozarc, Mozarc Medical, the Mozarc Medical logos, and Empowering Patients. Enriching Lives. are trademarks of Mozarc Medical.^{TM*} Third-party brands are trademarks of their respective owners. 08/2024. EMEA-RC-2400041 (v1.0)

Products may not be available in certain countries.

lezarc